



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

LIGHT SPECS

Juli 2025

LOCATION	WHAT	QT	DESCRIPTION
BALCONY	Desk	1x	AVOLITES ARENA [SOFTWARE VERSION 16.0 IP 2.0.0.11]
	Node	1x	LSC Nexus [Fixed on Balcony - IP 2.0.0.101]
	Dimmers	36x	2KW DIMMERCHANNEL
STAGE	Conventional	16x	PAR64 230V 1000W MFL [CP62 - SINGLY PATCHED]
		2x	PAR36 ACL-SET [2000W]
		4x	CATEYE [500W]
		6x	PAR64 SHORTNOSE 230V 1000W FLOORCAN MFL [CP62]
	Intelligent	4x	SHOWTEC ACTIVE SUNSTRIP [500W - WITH STAND]
		8x	CHAUVET MAVERICK FORCE S Spot [FIXED POSITION - IN TRUSS]
		4x	CHAUVET MAVERICK FORCE S Spot [FLOOR]
		12x	CHAUVET ROGUE R1 BeamWash [IN TRUSS]
		4x	CHAUVET ROGUE R1 BeamWash [FLOOR]
		2x	MARTIN ATOMIC STROBE 3000 [IN TRUSS]
	Power	1x	63A 3FASE CEE 230V/400V BEHIND STAGE - ACCES STAGERIGHT UPSTAGE
			DISTRIBUTION 1X63A CEE ->2X32A CEE BEHIND STAGE - ACCES STAGERIGHT UPSTAGE
			DISTRIBUTION 1X32A CEE ->6X 16A SHUKO
Hall	Conventional	4x	PC ADB [1Kw, FRONT]
		1x	LEKO ADB DW-104 [15-42DEG, 1000W, UPSTAGE CENTER]
		5x	STRAND HARMONY [15-28DEG], 1000W, STAGE RIGHT > STAGE LEFT]
		4x	PAR64 230V 1000W MFL, SIDE FRONT [CP62]
	Intelligent	4x	CHAUVET COLORSOURCE S Solo [FRONT]
		8x	CHAUVET COLORSOURCE S Solo [HALL]
		6x	CHAUVET MAVERICK FORCE S Spot
	Smoke	2x	CLF Haze II [1x Fixed on Balcony, 1x Stage floor]
	Gels		A VARIETY OF LEE COLOURGELS
	Misc.	1x	FLYBAR FOR BACKDROP UPSTAGE 8M WIDE - MAX. 12KG - BACKDROPS ONLY! - NO POINTLOADS!



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

LIGHT PATCH

Mei 2024

Lights controlled via ART-net Node

Gest IP: 2.0.0.1

Housedesk IP: 2.0.0.11

Node IP: 2.0.0.101

5 Universes - [Start at Artnet 0.1 (Not 0.0)]:

0.1: CONVENTIONALS & HALL

0.2: SPOTS & FLOOR

0.3: WASH

0.4: GUEST [EMPTY]

0.5: GUEST [EMPTY]

1 DIMMERS

Ch - House	Type	Patch	Mode	Location	Optics	Power
1	Front ADB PC 1Kw	1.1	1-CH	LX1	CP 62	1Kw
2	Front ADB PC 1Kw	1.2	1-CH	LX1	CP 62	1Kw
3	Front ADB PC 1Kw	1.3	1-CH	LX1	CP 62	1Kw
4	Front ADB PC 1Kw	1.4	1-CH	LX1	CP 62	1Kw
5	Cat-Eye Blinder	1.5	1-CH	LX1	CP 62	1Kw
6	Cat-Eye Blinder	1.6	1-CH	LX1	CP 62	1Kw
7	Cat-Eye Blinder	1.7	1-CH	LX2	CP 62	1Kw
8	Cat-Eye Blinder	1.8	1-CH	LX2	CP 62	1Kw
9	ACL	1.9	1-CH	LX2	CP 62	1Kw
10	ACL	1.10	1-CH	LX2	CP 62	1Kw
11	LEKO [Profile] 15-30	1.11	1-CH	LX2	CP 62	1Kw
12	LEKO [Profile] 15-30	1.12	1-CH	LX2	CP 62	1Kw
13	LEKO [Profile] 15-30	1.13	1-CH	LX1	5°	2Kw
14	LEKO [Profile] 15-30	1.14	1-CH	LX2	5°	2Kw
15	LEKO [Profile] 15-30	1.15	1-CH	LX1	120°	500w
16	LEKO [Profile] 15-30	1.16	1-CH	LX1	120°	500w
17	LEKO [Profile] 15-30	1.17	1-CH	LX2	120°	500w
18 thru 24	FREE	1.18-24	1-CH	LX2	120°	500w
37 thru 42	Free Dimmer Channel [Floor]	1.37-42	1-CH	Hall, Front	8-55°	2,3Kw



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

2 LED-pars

Ch - House	Type	Patch	Mode	Location	Optics	Power
201	Chauvet Colorado S Solo	1.43	TR16 Mode [17Ch]	Hall	7°-42°	123w
202	Chauvet Colorado S Solo	1.60	TR16 Mode [17Ch]	Hall	7°-42°	123w
203	Chauvet Colorado S Solo	1.77	TR16 Mode [17Ch]	Hall	7°-42°	123w
204	Chauvet Colorado S Solo	1.94	TR16 Mode [17Ch]	Hall	7°-42°	123w
205	Chauvet Colorado S Solo	1.111	TR16 Mode [17Ch]	Hall	7°-42°	123w
206	Chauvet Colorado S Solo	1.128	TR16 Mode [17Ch]	Hall	7°-42°	123w
207	Chauvet Colorado S Solo	1.145	TR16 Mode [17Ch]	Hall	7°-42°	123w
208	Chauvet Colorado S Solo	1.162	TR16 Mode [17Ch]	Hall	7°-42°	123w
211	Chauvet Colorado S Solo	1.179	TR16 Mode [17Ch]	Side	7°-42°	123w
212	Chauvet Colorado S Solo	1.196	TR16 Mode [17Ch]	Side	7°-42°	123w
213	Chauvet Colorado S Solo	1.213	TR16 Mode [17Ch]	Side	7°-42°	123w
214	Chauvet Colorado S Solo	1.230	TR16 Mode [17Ch]	Side	7°-42°	123w



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

3 Wash

Ch - House	Type	Patch	Mode	Location	Optics	Power
301	Chauvet ROGUE 1 BeamWash	3.1	[21CH]	LX1	5°-58,2°	280w
302	Chauvet ROGUE 1 BeamWash	3.22	[21CH]	LX1	5°-58,2°	280w
303	Chauvet ROGUE 1 BeamWash	3.43	[21CH]	LX1	5°-58,2°	280w
304	Chauvet ROGUE 1 BeamWash	3.64	[21CH]	LX1	5°-58,2°	280w
305	Chauvet ROGUE 1 BeamWash	3.85	[21CH]	LX1	5°-58,2°	280w
306	Chauvet ROGUE 1 BeamWash	3.106	[21CH]	LX1	5°-58,2°	280w
307	Chauvet ROGUE 1 BeamWash	3.127	[21CH]	LX2	5°-58,2°	280w
308	Chauvet ROGUE 1 BeamWash	3.148	[21CH]	LX2	5°-58,2°	280w
309	Chauvet ROGUE 1 BeamWash	3.169	[21CH]	LX2	5°-58,2°	280w
310	Chauvet ROGUE 1 BeamWash	3.190	[21CH]	LX2	5°-58,2°	280w
311	Chauvet ROGUE 1 BeamWash	3.211	[21CH]	LX2	5°-58,2°	280w
312	Chauvet ROGUE 1 BeamWash	3.232	[21CH]	LX2	5°-58,2°	280w
351	Chauvet ROGUE 1 BeamWash	2.349	[21CH]	Floor	5°-58,2°	280w
352	Chauvet ROGUE 1 BeamWash	2.370	[21CH]	Floor	5°-58,2°	280w
353	Chauvet ROGUE 1 BeamWash	2.391	[21CH]	Floor	5°-58,2°	280w
354	Chauvet ROGUE 1 BeamWash	2.412	[21CH]	Floor	5°-58,2°	280w

4 Spot

Ch - House	Type	Patch	Mode	Location	Optics	Power
401	Chauvet Maverick Force S Spot	2.1	[29CH]	LX1	4,7°-40,5°	521w
402	Chauvet Maverick Force S Spot	2.30	[29CH]	LX1	4,7°-40,5°	521w
403	Chauvet Maverick Force S Spot	2.59	[29CH]	LX1	4,7°-40,5°	521w
404	Chauvet Maverick Force S Spot	2.88	[29CH]	LX1	4,7°-40,5°	521w
405	Chauvet Maverick Force S Spot	2.117	[29CH]	LX2	4,7°-40,5°	521w
406	Chauvet Maverick Force S Spot	2.146	[29CH]	LX2	4,7°-40,5°	521w
407	Chauvet Maverick Force S Spot	2.175	[29CH]	LX2	4,7°-40,5°	521w
408	Chauvet Maverick Force S Spot	2.204	[29CH]	LX2	4,7°-40,5°	521w
451	Chauvet Maverick Force S Spot	2.233	[29CH]	Floor	4,7°-40,5°	521w
452	Chauvet Maverick Force S Spot	2.262	[29CH]	Floor	4,7°-40,5°	521w
453	Chauvet Maverick Force S Spot	2.291	[29CH]	Floor	4,7°-40,5°	521w
454	Chauvet Maverick Force S Spot	2.320	[29CH]	Floor	4,7°-40,5°	521w
471	Chauvet Maverick Force S Spot	1.247	[29CH]	Hall	4,7°-40,5°	521w
472	Chauvet Maverick Force S Spot	1.276	[29CH]	Hall	4,7°-40,5°	521w
473	Chauvet Maverick Force S Spot	1.305	[29CH]	Hall	4,7°-40,5°	521w
474	Chauvet Maverick Force S Spot	1.334	[29CH]	Hall	4,7°-40,5°	521w
475	Chauvet Maverick Force S Spot	1.363	[29CH]	Hall	4,7°-40,5°	521w
476	Chauvet Maverick Force S Spot	1.392	[29CH]	Hall	4,7°-40,5°	521w



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

5 Sunstrips

Ch - House	Type	Patch	Mode	Location	Optics	Power
501	Showtec Active Sunstrip MK2	2.433	[10CH]	Floor	16°	500w
502	Showtec Active Sunstrip MK2	2.443	[10CH]	Floor	16°	500w
503	Showtec Active Sunstrip MK2	2.453	[10CH]	Floor	16°	500w
504	Showtec Active Sunstrip MK2	2.463	[10CH]	Floor	16°	500w

6 Strobe

Ch - House	Type	Patch	Mode	Location	Optics	Power
701	Chauvet Strike Bolt-1C	3.253	[10CH]	LX2	-	339w
702	Chauvet Strike Bolt-1C	3.263	[10CH]	LX2	-	339w


7 Haze & Smoke

Ch - House	Type	Patch	Mode	Location	Optics	Power
666	Smoke Factory Tour Hazer II	2.509	[2CH]	Balcony		1Kw
667	Smoke Factory Tour Hazer II	2.511	[2CH]	Floor		1Kw
668	Martin ZR44	2.500	[1CH]	Floor		1,8Kw

DE HELLING



De Helling plot 2025

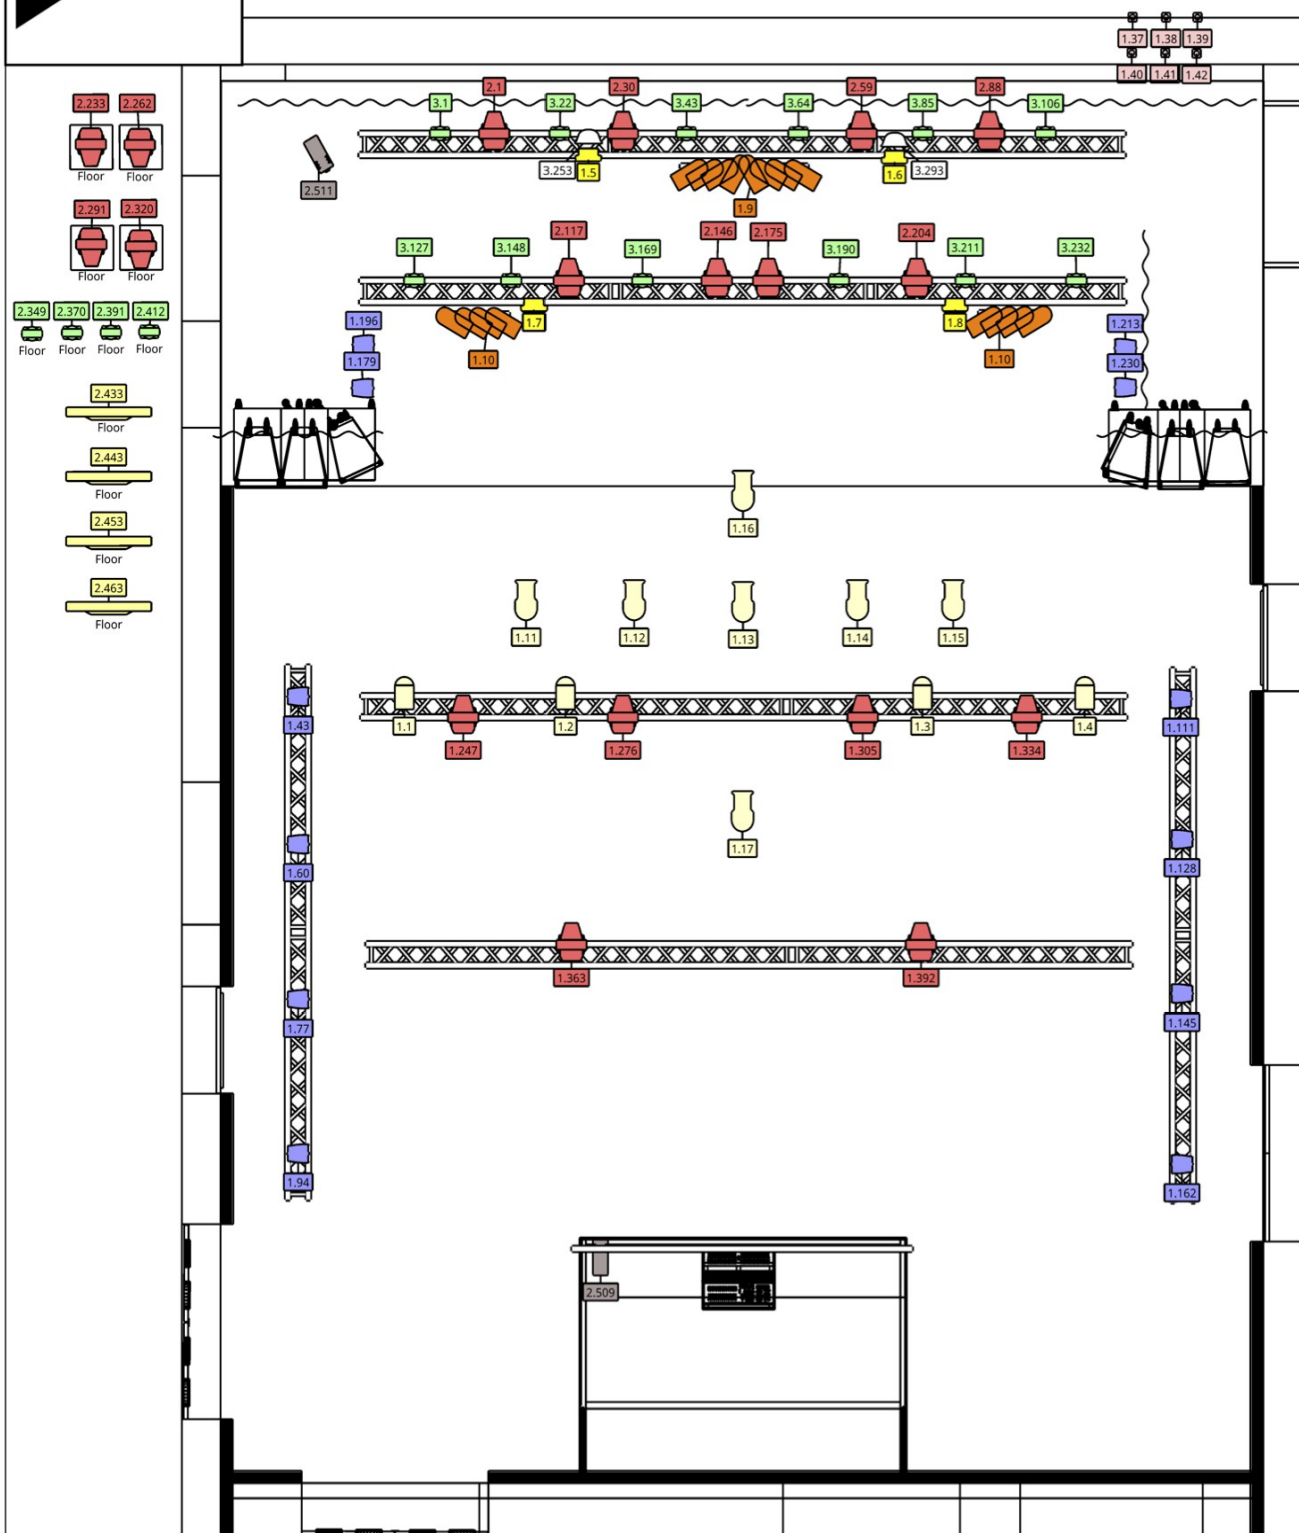

Symbol key



Maverick Force S
Spot (18)



ACL (2 sets)



Rogue R1
BeamWash (16)




COLORado 2 Solo
(12)



Profil 15/30 (7)



Free Dimmer
Channel (6)



Sunstrip Active MKII
(4)



Cat-Eye Blind (4)



ADB PC 1Kw (4)



Haze II (2)



Strike Bolt 1C (2)