



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

LIGHT SPECS

Juni 2026

LOCATION	WHAT	QT	DESCRIPTION	
BALCONY	Desk	1x	AVOLITES ARENA [SOFTWARE VERSION 17.1 IP 2.0.0.11]	
	Node	1x	LSC Nexus [Fixed on Balcony - IP 2.0.0.101]	
	Dimmers	36x	2KW DIMMERCHANNEL	
STAGE	Conventional	2x	PAR36 ACL-SET [2000W]	
		4x	CATEYE [500W]	
		6x	PAR64 SHORTNOSE 230V 1000W FLOORCAN MFL [CP62]	
		4x	SHOWTEC ACTIVE SUNSTRIP [500W - WITH STAND]	
	Intelligent	8x	CHAUVET MAVERICK FORCE S Spot [FIXED POSITION - IN TRUSS]	
		4x	CHAUVET MAVERICK FORCE S Spot [FLOOR]	
		12x	CHAUVET ROGUE R1 BeamWash [FIXED POSITION - IN TRUSS]	
		4x	CHAUVET ROGUE R1 BeamWash [FLOOR]	
		2x	CHAUVET BOLT 1C Strobe [IN TRUSS]	
		4x	CHAUVET COLORSOURCE S Solo [SIDE]	
		Power	1x	63A 3FASE CEE 230V/400V BEHIND STAGE - ACCES STAGERIGHT UPSTAGE DISTRIBUTION 1X63A CEE ->2X32A CEE BEHIND STAGE - ACCES STAGERIGHT UPSTAGE DISTRIBUTION 1X32A CEE ->6X 16A SHUKO
	Hall	Conventional	4x	PC ADB [1Kw, FRONT]
			7x	LEKO ADB DW-104 [15-42DEG, 1000W, UPSTAGE CENTER]
Intelligent		8x	CHAUVET COLORSOURCE S Solo [HALL]	
		6x	CHAUVET MAVERICK FORCE S Spot	
Smoke Gels		2x	Smoke Factory Tour Haze [1x Fixed on Balcony, 1x Stage floor] A VARIETY OF LEE COLOURGELS	
		Rigging	Trusses	LX 1 [Stage]
LX 2 [Stage]	Electric Chain hoist			Max total load 800 Kg
LX 3 [Front, Hall]	Electric Chain hoist			Max total load 800 Kg
LX 4 [Hall]	Dead hang			Max total load 120 Kg
LX 5 + 6 [Hall Side]	Dead hang			Max total load 120 Kg
Backdrop Ladder truss				Max total load 80 Kg
Grid	Fixed single tube grid throughout hall		Max point load 40 Kg	
Video	Projector	Epson H611B	Dual Lamp 10K Projector	
	Screen	Fixed on wall	6m x 3,375m (BxH)	
			ATEM 4 in 2 out SDI Switch with Blackmagic SDI Infra	

DE HELLING



LIGHT PATCH

Juni 2026

De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

Lights controlled via ART-net Node

Gest IP: 2.0.0.1

Housedesk IP: 2.0.0.11

Node IP: 2.0.0.101

5 Universes - [Start at Artnet 0.1 (Not 0.0)]:

0.1: CONVENTIONALS & HALL

0.2: SPOTS & FLOOR

0.3: WASH

0.4: GUEST [EMPTY]

0.5: GUEST [EMPTY]

1 DIMMERS

Ch - House	Type	Patch	Mode	Location	Optics	Power
1	Front ADB PC 1Kw	1.1	1-CH	LX1	CP 62	1Kw
2	Front ADB PC 1Kw	1.2	1-CH	LX1	CP 62	1Kw
3	Front ADB PC 1Kw	1.3	1-CH	LX1	CP 62	1Kw
4	Front ADB PC 1Kw	1.4	1-CH	LX1	CP 62	1Kw
5	Cat-Eye Blinder	1.5	1-CH	LX1	CP 62	1Kw
6	Cat-Eye Blinder	1.6	1-CH	LX1	CP 62	1Kw
7	Cat-Eye Blinder	1.7	1-CH	LX2	CP 62	1Kw
8	Cat-Eye Blinder	1.8	1-CH	LX2	CP 62	1Kw
9	ACL	1.9	1-CH	LX2	CP 62	1Kw
10	ACL	1.10	1-CH	LX2	CP 62	1Kw
11	LEKO [Profile] 15-30	1.11	1-CH	LX2	CP 62	1Kw
12	LEKO [Profile] 15-30	1.12	1-CH	LX2	CP 62	1Kw
13	LEKO [Profile] 15-30	1.13	1-CH	LX1	5°	2Kw
14	LEKO [Profile] 15-30	1.14	1-CH	LX2	5°	2Kw
15	LEKO [Profile] 15-30	1.15	1-CH	LX1	120°	500w
16	LEKO [Profile] 15-30	1.16	1-CH	LX1	120°	500w
17	LEKO [Profile] 15-30 (DJ)	1.17	1-CH	LX2	120°	500w
18 thru 24	FREE	1.18-24	1-CH	LX2	120°	500w
37 thru 42	Free Dimmer Channel [Floor]	1.37-42	1-CH	Hall, Front	8-55°	2,3Kw



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

2 LED-pars

Ch - House	Type	Patch	Mode	Location	Optics	Power
201	Chauvet Colorado S Solo	1.43	TR16 Mode [17Ch]	Hall	7°-42°	123w
202	Chauvet Colorado S Solo	1.60	TR16 Mode [17Ch]	Hall	7°-42°	123w
203	Chauvet Colorado S Solo	1.77	TR16 Mode [17Ch]	Hall	7°-42°	123w
204	Chauvet Colorado S Solo	1.94	TR16 Mode [17Ch]	Hall	7°-42°	123w
205	Chauvet Colorado S Solo	1.111	TR16 Mode [17Ch]	Hall	7°-42°	123w
206	Chauvet Colorado S Solo	1.128	TR16 Mode [17Ch]	Hall	7°-42°	123w
207	Chauvet Colorado S Solo	1.145	TR16 Mode [17Ch]	Hall	7°-42°	123w
208	Chauvet Colorado S Solo	1.162	TR16 Mode [17Ch]	Hall	7°-42°	123w
211	Chauvet Colorado S Solo	1.179	TR16 Mode [17Ch]	Side	7°-42°	123w
212	Chauvet Colorado S Solo	1.196	TR16 Mode [17Ch]	Side	7°-42°	123w
213	Chauvet Colorado S Solo	1.213	TR16 Mode [17Ch]	Side	7°-42°	123w
214	Chauvet Colorado S Solo	1.230	TR16 Mode [17Ch]	Side	7°-42°	123w

3 Wash

Ch - House	Type	Patch	Mode	Location	Optics	Power
301	Chauvet ROGUE 1 BeamWash	3.1	[21CH]	LX1	5°-58,2°	280w
302	Chauvet ROGUE 1 BeamWash	3.22	[21CH]	LX1	5°-58,2°	280w
303	Chauvet ROGUE 1 BeamWash	3.43	[21CH]	LX1	5°-58,2°	280w
304	Chauvet ROGUE 1 BeamWash	3.64	[21CH]	LX1	5°-58,2°	280w
305	Chauvet ROGUE 1 BeamWash	3.85	[21CH]	LX1	5°-58,2°	280w
306	Chauvet ROGUE 1 BeamWash	3.106	[21CH]	LX1	5°-58,2°	280w
307	Chauvet ROGUE 1 BeamWash	3.127	[21CH]	LX2	5°-58,2°	280w
308	Chauvet ROGUE 1 BeamWash	3.148	[21CH]	LX2	5°-58,2°	280w
309	Chauvet ROGUE 1 BeamWash	3.169	[21CH]	LX2	5°-58,2°	280w
310	Chauvet ROGUE 1 BeamWash	3.190	[21CH]	LX2	5°-58,2°	280w
311	Chauvet ROGUE 1 BeamWash	3.211	[21CH]	LX2	5°-58,2°	280w
312	Chauvet ROGUE 1 BeamWash	3.232	[21CH]	LX2	5°-58,2°	280w
351	Chauvet ROGUE 1 BeamWash	2.349	[21CH]	Floor	5°-58,2°	280w
352	Chauvet ROGUE 1 BeamWash	2.370	[21CH]	Floor	5°-58,2°	280w
353	Chauvet ROGUE 1 BeamWash	2.391	[21CH]	Floor	5°-58,2°	280w
354	Chauvet ROGUE 1 BeamWash	2.412	[21CH]	Floor	5°-58,2°	280w



De Helling

Helling 7
3523CB Utrecht
The Netherlands

+31[0]30 22 1 99 44

production@dehelling.nl
www.dehelling.nl

4 Spot

Ch - House	Type	Patch	Mode	Location	Optics	Power
401	Chauvet Maverick Force S Spot	2.1	[29CH]	LX1	4,7°-40,5°	521w
402	Chauvet Maverick Force S Spot	2.30	[29CH]	LX1	4,7°-40,5°	521w
403	Chauvet Maverick Force S Spot	2.59	[29CH]	LX1	4,7°-40,5°	521w
404	Chauvet Maverick Force S Spot	2.88	[29CH]	LX1	4,7°-40,5°	521w
405	Chauvet Maverick Force S Spot	2.117	[29CH]	LX2	4,7°-40,5°	521w
406	Chauvet Maverick Force S Spot	2.146	[29CH]	LX2	4,7°-40,5°	521w
407	Chauvet Maverick Force S Spot	2.175	[29CH]	LX2	4,7°-40,5°	521w
408	Chauvet Maverick Force S Spot	2.204	[29CH]	LX2	4,7°-40,5°	521w
451	Chauvet Maverick Force S Spot	2.233	[29CH]	Floor	4,7°-40,5°	521w
452	Chauvet Maverick Force S Spot	2.262	[29CH]	Floor	4,7°-40,5°	521w
453	Chauvet Maverick Force S Spot	2.291	[29CH]	Floor	4,7°-40,5°	521w
454	Chauvet Maverick Force S Spot	2.320	[29CH]	Floor	4,7°-40,5°	521w
471	Chauvet Maverick Force S Spot	1.247	[29CH]	Hall	4,7°-40,5°	521w
472	Chauvet Maverick Force S Spot	1.276	[29CH]	Hall	4,7°-40,5°	521w
473	Chauvet Maverick Force S Spot	1.305	[29CH]	Hall	4,7°-40,5°	521w
474	Chauvet Maverick Force S Spot	1.334	[29CH]	Hall	4,7°-40,5°	521w
475	Chauvet Maverick Force S Spot	1.363	[29CH]	Hall	4,7°-40,5°	521w
476	Chauvet Maverick Force S Spot	1.392	[29CH]	Hall	4,7°-40,5°	521w

5 Sunstrips

Ch - House	Type	Patch	Mode	Location	Optics	Power
501	Showtec Active Sunstrip MK2	2.433	[10CH]	Floor	16°	500w
502	Showtec Active Sunstrip MK2	2.443	[10CH]	Floor	16°	500w
503	Showtec Active Sunstrip MK2	2.453	[10CH]	Floor	16°	500w
504	Showtec Active Sunstrip MK2	2.463	[10CH]	Floor	16°	500w

6 Strobe

Ch - House	Type	Patch	Mode	Location	Optics	Power
701	Chauvet Strike Bolt-1C	3.253	[10CH]	LX2	-	339w
702	Chauvet Strike Bolt-1C	3.263	[10CH]	LX2	-	339w


7 Haze & Smoke

Ch - House	Type	Patch	Mode	Location	Optics	Power
666	Smoke Factory Tour Hazer II	2.509	[2CH]	Balcony		1Kw
667	Smoke Factory Tour Hazer II	2.511	[2CH]	Floor		1Kw
668	Martin ZR44	2.500	[1CH]	Floor		1,8Kw

DE HELLING



De Helling plot 2026

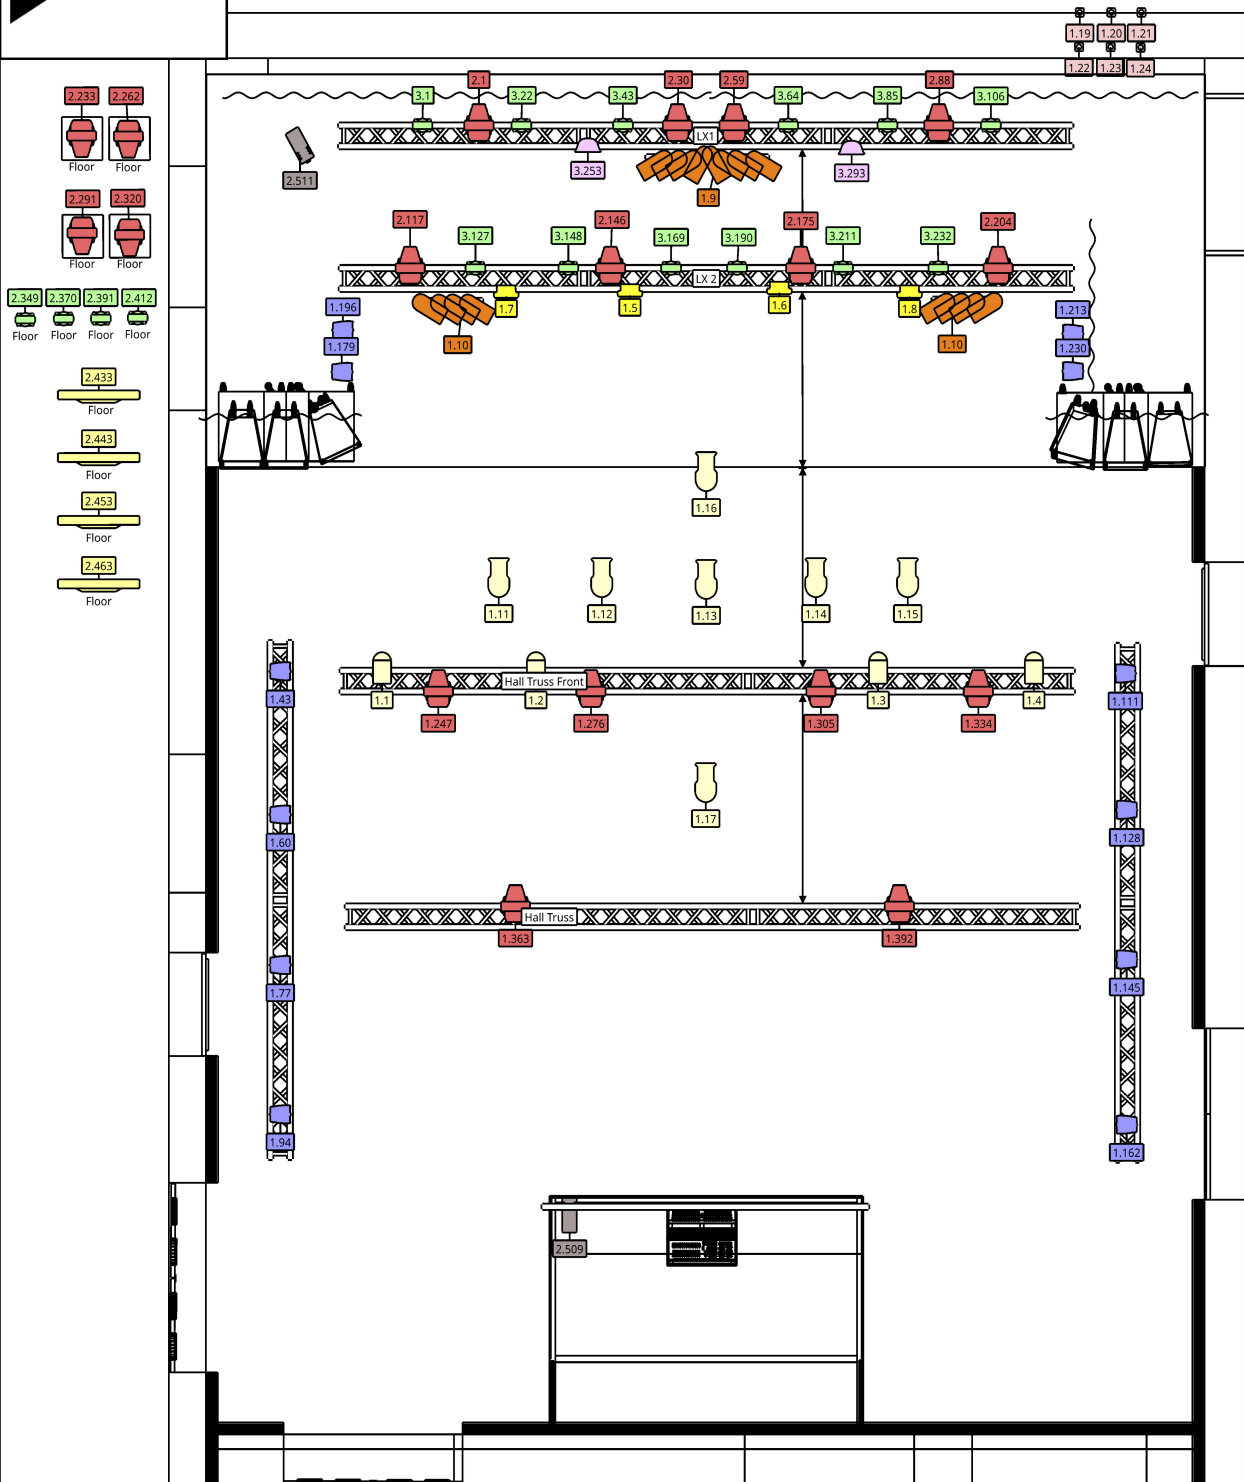

Symbol key



Maverick Force S
Spot (18)



ACL (2 sets)



Rogue R1
BeamWash (16)




COLORado 2 Solo
(12)



Profiel 15/30 (7)



Free Dimmer
Channel (6)



Sunstrip Active MKII
(4)



Cat-Eye Blind (4)



ADB PC 1Kw (4)



Haze II (2)



Strike Bolt 1C (2)